
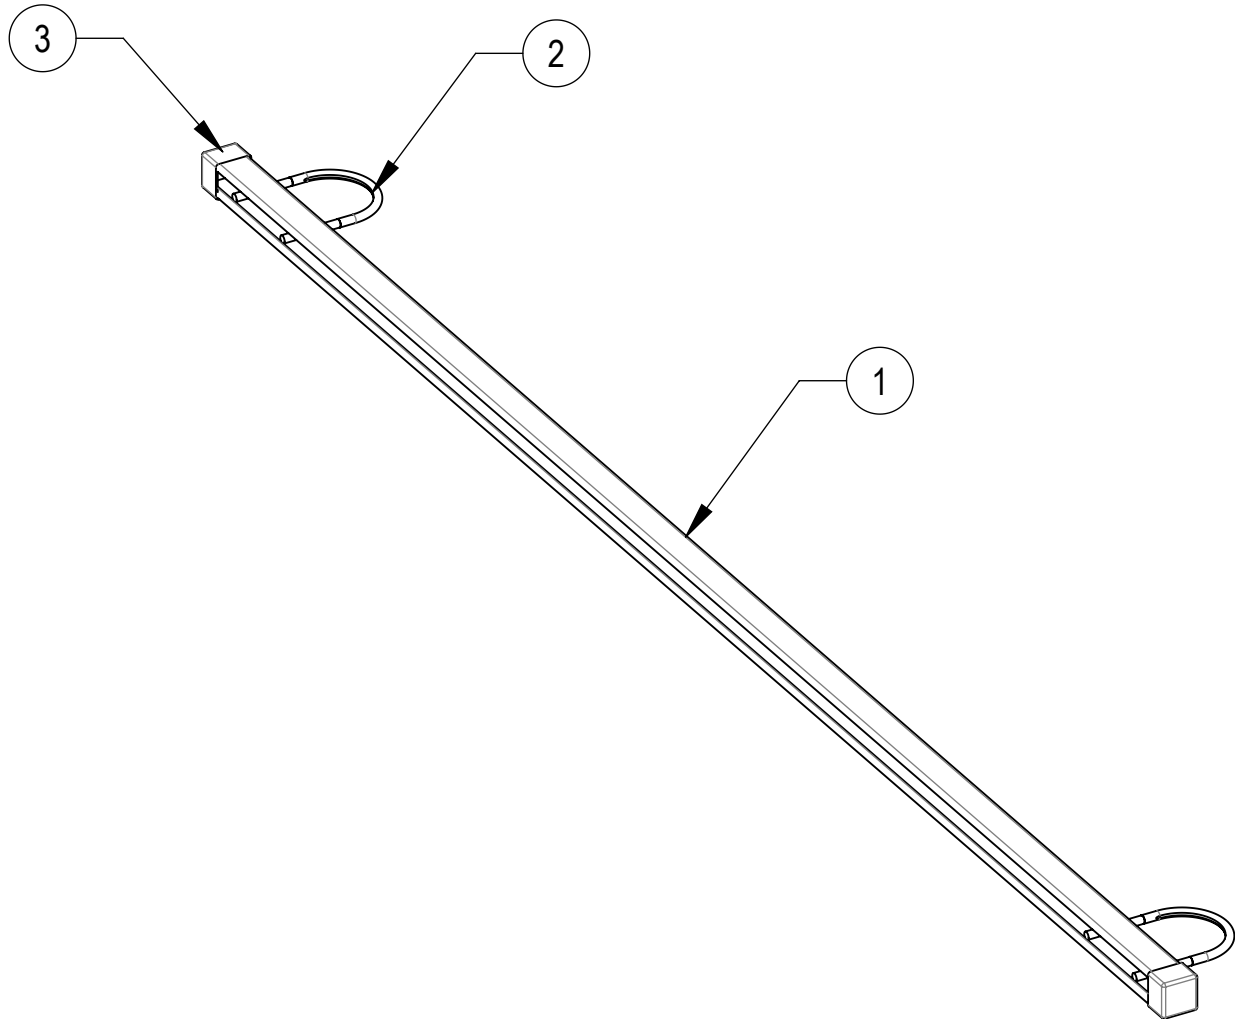
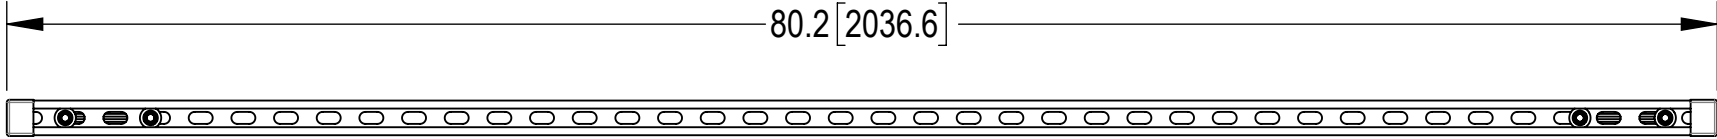


- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL U-BOLTS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF U-BOLT.
- 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
- 3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	ACG 03MAY07	TP
B	REVISED FORMAT	RJC 02SEP20	8000042630
C	UPDATED DRAWING TO NEW FORMAT; UPDATED VIEWS FOR MT50480 (ITEM 1) CHANGES	YC1059 07JAN26	BA1025 50106469AMO

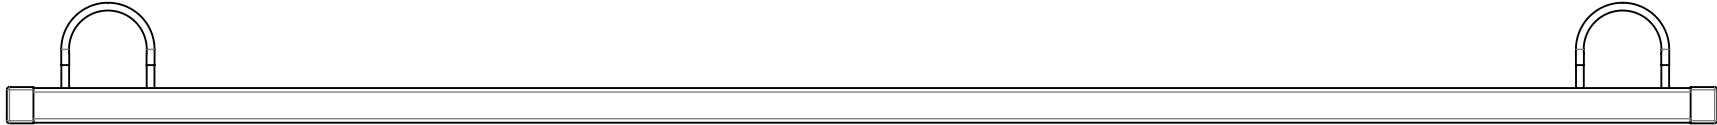

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	MT50480	UNISTRUT, SLOTTED, GALV, 1-5/8 SQ X 80"	1	13.56 LBS	
2	GUB-3355	3/8" X 3-5/8" X 5-1/4" GALV U-BOLT	2	0.40 LBS	
3	PTCR01	END CAP	2	0.04 LBS	

DENSITY		lbs/in³
MASS	14.60	lbs
VOLUME	52.85	in³
SURFACE AREA	885.61	in²
HEIGHT	1.7"	
LENGTH	80.0"	
WIDTH	5.7"	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	TITLE
	CE	ACG	03MAY07	
	RW	YC1059	01/13/2026	
	AD	YMENG	01/15/2026	H-FRAME-RUNG-KIT 80" W/U-BOLTS
	RE	YMENG	01/15/2026	
	ECN	50106469AMO		

SCALE	DOCUMENT NO.
1:9	PT-RK

SIZE	Auth Group	INSL	MODEL			DRAWING			SHEET
C			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION	
			02	RE	C	02	RE	C	1 OF 1

Confidential