
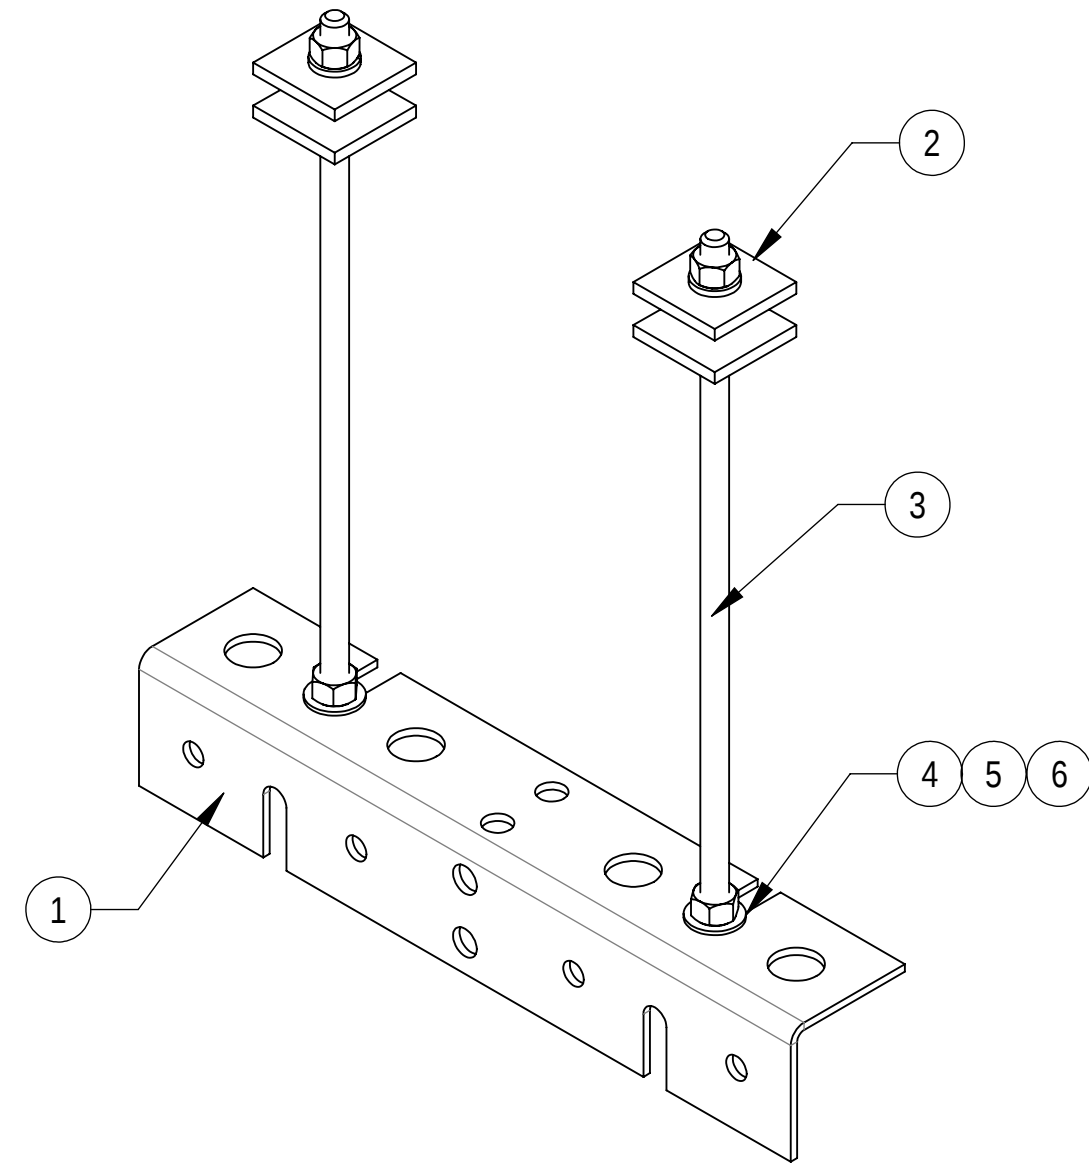
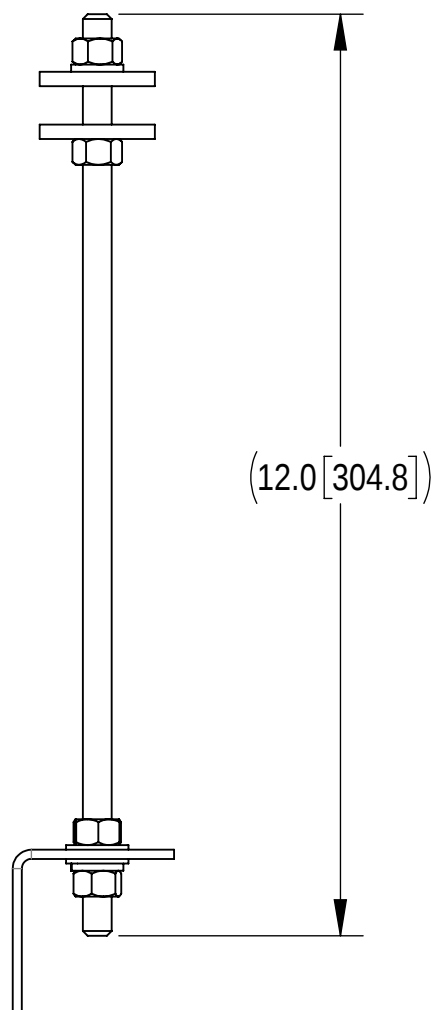
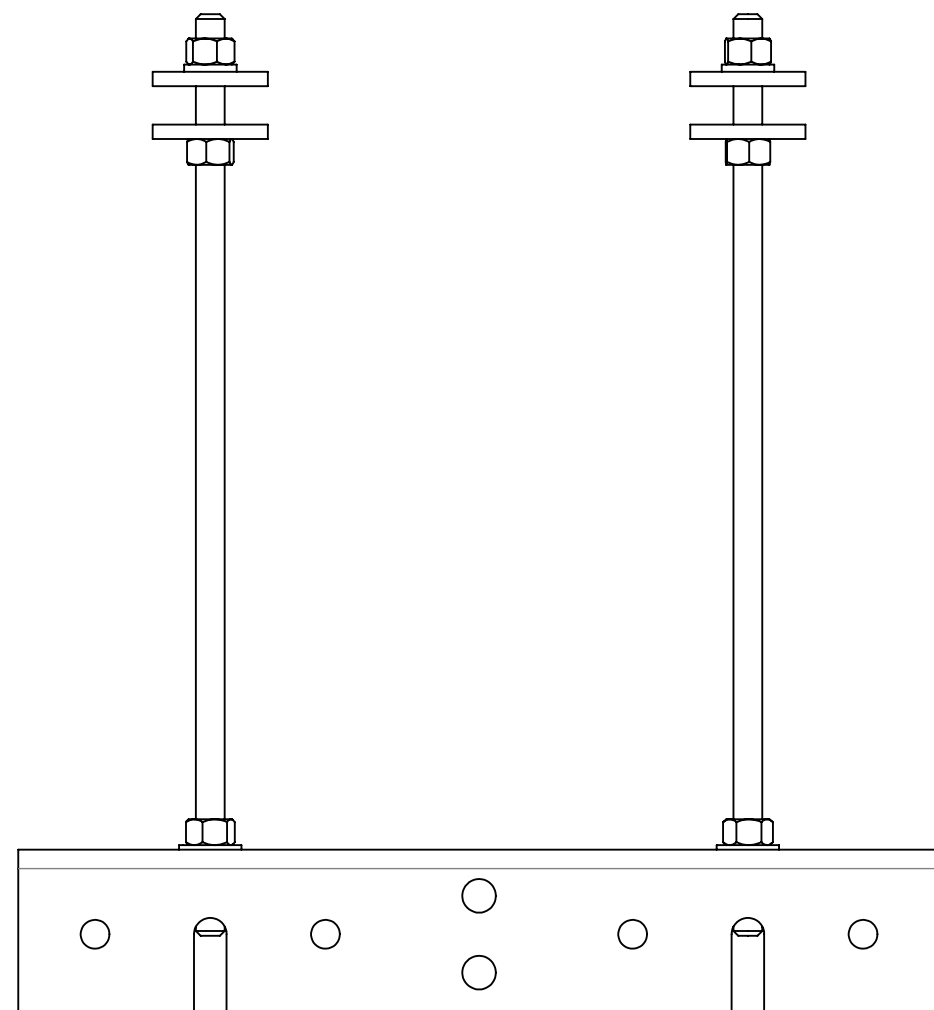


1.0 GENERAL NOTES

- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
 - 3.1 TIGHTEN ALL BOLTS 3/8" OR LARGER SECURING FLAT PLATES SNUG TIGHT.
TIGHTEN ALL THREADED RODS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THREADED ROD.
 - 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
 - 3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.
- 4.0 TEST
- 5.0 PACKAGING
 - 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
 - 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
 - 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	ACG 09FEB05	TP
B	UPDATE HARDWARE KIT	ACG 07MAR06	TP
C	UPDATED DRAWING FORMAT	NSUN 25FEB26	BA1025 50107201AMO

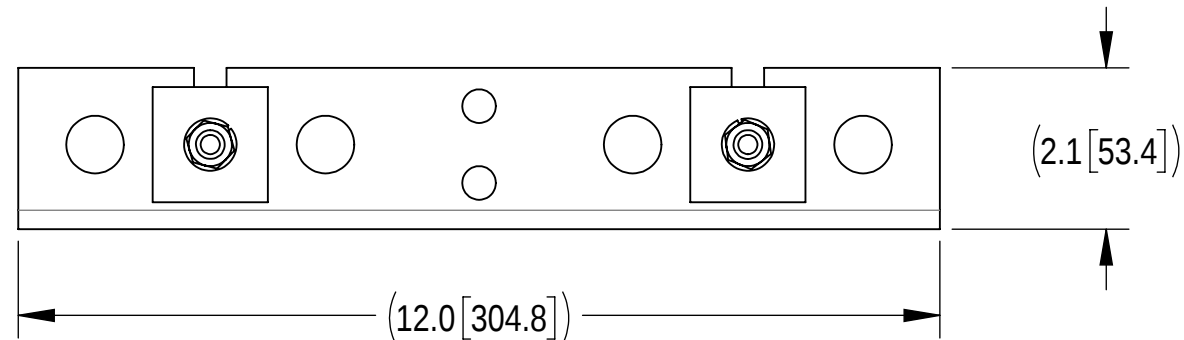

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	WBT12302	12" HORIZONTAL TRAPEZE SECTION	1	1.46 LBS	
2	MT-387	SQUARE WASHER 1-1/2"x1-1/2" W/ 7/16 HOLE	4	0.11 LBS	
3	MT-373	3/8" X 12" SS THREADED ROD	2	0.37 LBS	
4	SWF-03	3/8" SS FLAT WASHER	4	0.01 LBS	
5	SWL-03	3/8" SS LOCK WASHER	4	0.01 LBS	
6	SN-03	3/8" SS HEX NUT	8	0.02 LBS	

DENSITY		lbs/in
MASS	2.85	lbs
VOLUME	10.11	in ³
SURFACE AREA	162.69	in ²
HEIGHT	12.0"	
LENGTH	12.0"	
WIDTH	2.1"	

Confidential

</