
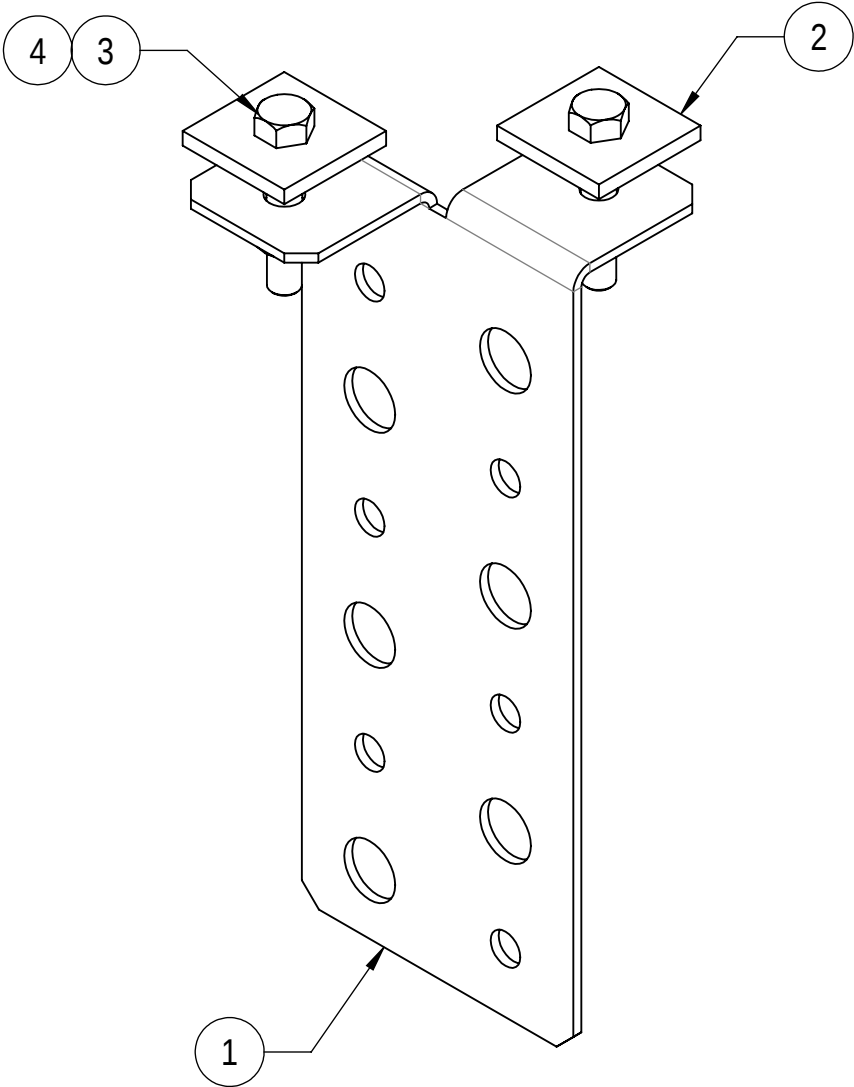
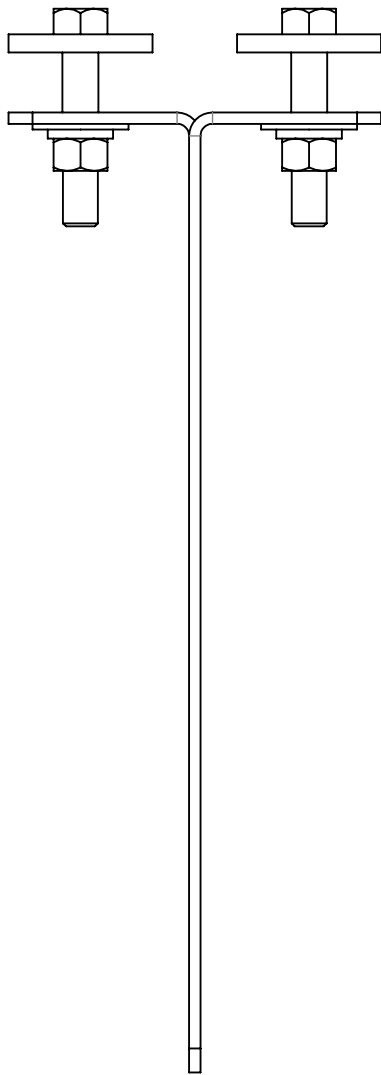
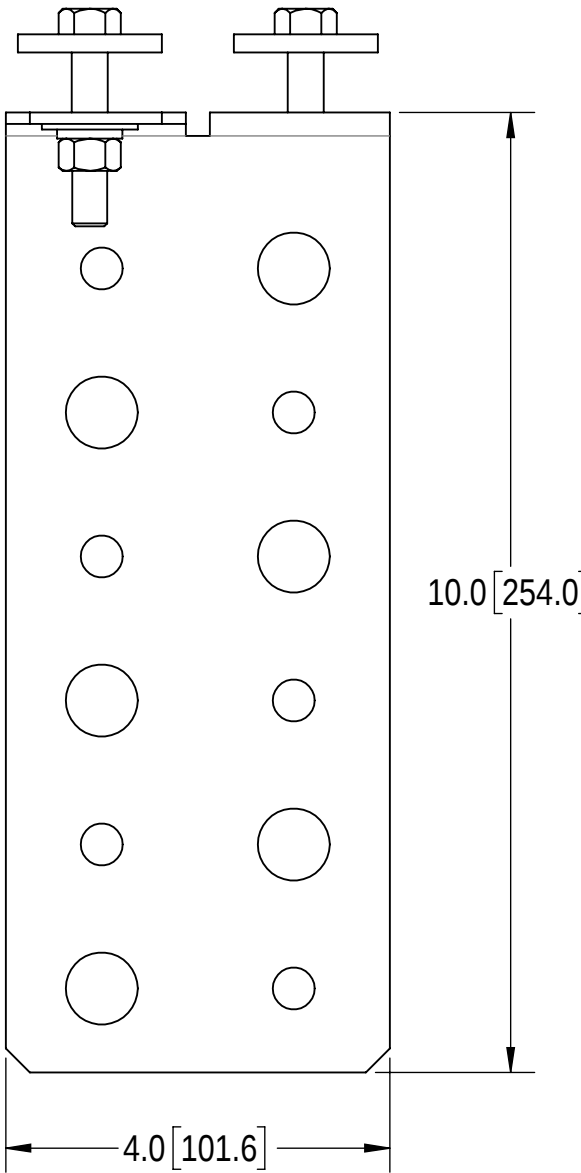


1.0 GENERAL NOTES
1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
1.2 FOR PATENT INFO: <https://www.adwpat.com>
2.0 DESIGN NOTES
3.0 MANUFACTURING/SPECIAL REQUIREMENTS
3.1 TIGHTEN ALL BOLTS 3/8" OR LARGER SECURING FLAT PLATES SNUG TIGHT.
3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.
4.0 TEST
5.0 PACKAGING
5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
5.3 EXTRA HARDWARE MAY BE SUPPLIED,BAGGEO AND SHIPPED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	MSM 01MAY12	
B	INCREASED LENGTH OF BOLTS	DRR 30OCT12	TP
C	UPDATED DRAWING FORMAT TO NEW	JJ1095 02MAR26	BA1025 50107239AMO

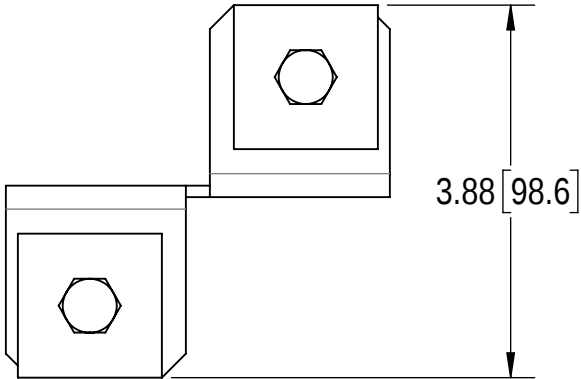

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES; INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.					
ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	ZBV601	SINGLE 6 CABLE BRACKET	1	1.42 LBS	
2	MT-387	SQUARE WASHER 1-1/2"X1-1/2" W/ 7/16 HOLE	2	0.11 LBS	
3	GB-03205	3/8" X 2" GALV BOLT KIT	2	0.08 LBS	
4	GWF-03	3/8" GALV FLAT WASHER	2	0.01 LBS	

DENSITY	lbs/in³	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994	RW	JJ1095	03/06/2026	SCALE 1:2 DOCUMENT NO. ZB-V6						
MASS	1.87											
VOLUME	6.65		AD	YMENG	03/06/2026							
SURFACE AREA	117.67		RE	YMENG	03/10/2026							
			ECN 50107239AMO									
HEIGHT	11.1"	SIZE	Auth Group		INSL	MODEL			DRAWING			SHEET 1 OF 1
LENGTH	4.0"	C	 		VERSION	STATUS	REVISION	VERSION	STATUS	REVISION		
WIDTH	3.9"				02	RE	C	01	RE	C		

Confidential